
WILTON CARPETS



Inspired design. Made to last.



CHANTILLY

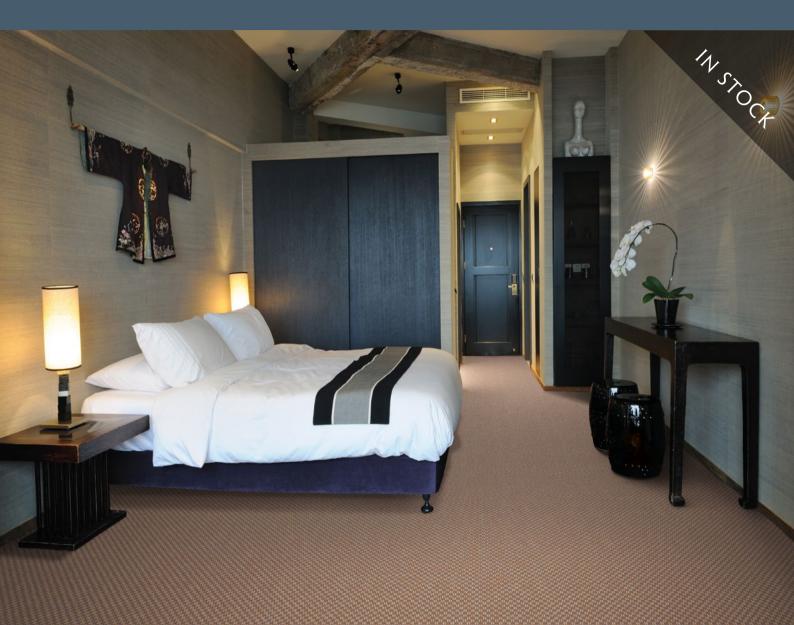

orly 300/50238



lyon 304/50238



avignon 301/50238



cambrai 305/50238



clichy 302/50238



reims 306/50238



bordeaux 303/50238



lille 307/50238

Construction	Tufted
Pile composition	80% Wool 20% Nylon – BS 3655
Gauge	31.5 per 10cm (8 per inch)
Pile weight	1288gm/m² (38oz per sq yd) ISO 8543 - BS 4223 +/-10%
Secondary back	Synthetic
Width	4.00m (13ft 11/2") ISO 1765 – BS 4223
Thickness	9.00mm +/- 1mm (0.35 inches) ISO 1765 - BS 4223
Total weight	2325gm/m² (68.59oz per sq yd) ISO 8543 - BS 4223
Use	Heavy Contract
	The above details are subject to normal commercial tolerances. A fully detailed specification for this product can be made available by application to The Wilton Carpet Factory Limited.
Fire test	Radiant Panel ISO 9239-1 Smoke Generation EN ISO 11925-2
Fire classification	Cfl s1 CE EN 14041:2004
Marine fire certification	IMO & U.S.A. Coastguard Approved IMO Resolution A653 (16) IMO Resolution MSC 61 (67) Annex 1 part 5 & Annex 2
Colour fastness	Wet 3-4 (Scale 1-5)
Installation	In accordance with BS 5325:2001 or any later revision – Installation of textile floor coverings – Code of practice.
Maintenance	Please refer to The Wilton Carpet Factory Ltd for full maintenance advice.



The Wilton Carpet Factory Limited

Minster Street, Wilton, Salisbury Wiltshire SP2 OAY

t 01722 746000 f 01722 742923 e sales@wiltoncarpets.com

www.wiltoncarpets.com

© Copyright The Wilton Carpet Factory Limited

All copyright, design rights and intellectual property rights existing in our designs are and will remain the property of The Wilton Carpet Factory Limited. Any infringement of these rights will result in appropriate legal action. Colours are reproduced within the limits of the printing process.

